




Project:
Quantity:
Notes:
Type

Performance

Charge Time	3 hrs/8 hrs Cloudy
Operating Time	16+ Hours
Compressive Strength	310,000 N
Cycles (Days)	100,000
Expected Life	10+ yrs

General

Warranty	3 Year Full Replacement
Lens Construction	UV Stabilized Polycarbonate
Housing	PVDV Coated Aluminum
Water Proof Rating	IP68
Operating Temperature	-13°F to 158°F
Dimensions (in)	Ø 5.67 x 3.56 mm
Weight (lbs)	1.54

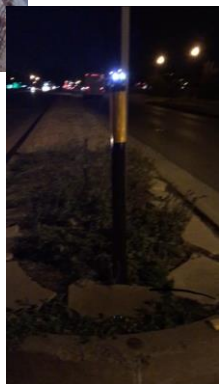

Component Specifications

Single Mono-Crystalline Solar Cell	Solar Module Size	47 x 47 mm
	Solar Maximum Output Power	0.267W
	Solar Operating Current	54mA
	Solar Voltage	4.95V
LED	LED Size	Ø5 LED
	LED Current	20mA per each
	LED Operating Current	8mA (4PCS)
	LED Voltage	3V
	LED Wattage	0.024W(4PCS)
	LED Quantities	3 pcs / 6 pcs
Lithium Ion Battery	Lithium Ion Battery	3.7V, 2,600mA

How to specify:

Model

Function

Color

SWL135

Lux

S-Steady

R-Red

333

FF-Fast Flash

G-Green

515.5

SF-Slow Flash

B-Blue

83.55

Y-Yellow

272.5

W-White

780

Example: SWL135-S-WW

SWL135, Steady, White Bi-Direction